




ENERWATT

WP5-6

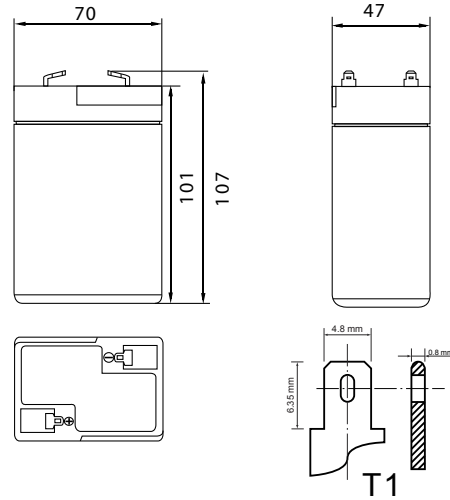

Spécifications / Specifications

Voltage		6
Rated Capacity		5 Ah
Dimensions	Longeur / Length	70 mm / 2,76 "
	Largeur / Width	47 mm / 1,85 "
	Hauteur / Height	101 mm / 3,98 "
	Hauteur total / Total Height	107 mm / 4,21 "
Poids / Weight		0,8 kg / 1,81 lb

Caracteristiques / Charateristic

Capacité / Capacity 25°C (77°F)	20h rate	0,25 AH	
	10h rate	0,45 AH	
	5h rate	0,85 AH	
	1h rate	3 AH	
Resistance interne Internal Resistance	Full Charged Battery 25°C (77°F)	Approx. 20 mΩ	
Max. discharge current 25°C (77°F)	75 A (5s)		
Charge (constant Voltage. 25°C)	Cycle	7.25~7.45V (-12mV/°C) max. current : 1,5 A	
	float	6.8~6.9V (-9mV/°C)	
Depth of discharge (D.O.D)	100%	50%	30%
Number of cycles	200	425	1225

Constant Current Discharge Characteristics (A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
4.80V	18.5	11.8	9.50	5.75	3.20	1.27	0.87	0.45	0.25
5.10V	17.6	11.2	9.12	5.52	3.07	1.25	0.86	0.44	0.25
5.25V	16.5	10.5	8.66	5.24	2.92	1.23	0.84	0.44	0.24

Constant Wattage Discharge Characteristics (Watt,25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
4.80V	103	66.6	54.2	32.9	18.5	7.54	5.21	2.68	1.50
5.10V	98.1	63.2	52.0	31.6	17.8	7.43	5.13	2.66	1.50
5.25V	92.2	59.4	49.4	30.0	16.9	7.28	5.03	2.66	1.44

Disponible chez / Available at
www.batteriesexpert.com
 1 800 661-3330

