



PROLINE 3000
PROLINE 5000
PROLINE 8000
PROLINE 10,000


PROLINE

DC TO AC MSW INVERTER

AVAILABLE IN
12V, 24V, & 48V

NOW UP TO 50%
SMALLER AND LIGHTER!

2-YEAR
LIMITED WARRANTY

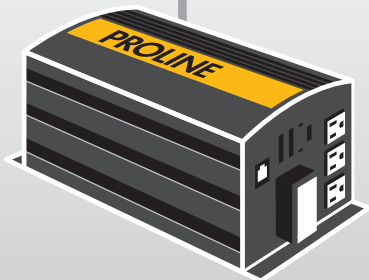

TURN YOUR SOLAR ENERGY & OTHER DC POWER INTO GREEN HOUSEHOLD ENERGY

RoHS
compliant



**ALSO AVAILABLE
IN 24V & 48V**



SPECIFICATIONS


	PROLINE 3000	PROLINE 5000	PROLINE 8000	PROLINE 10,000
Item Number	3742	3744	3746	3748
Continuous Power	3,000 Watts	5,000 Watts	8,000 Watts	10,000 Watts
Surge Power	6,000 Watts	10,000 Watts	16,000 Watts	20,000 Watts
Input (24V/48V also available)	11V - 15V			
Output	115V - 125V			
Output Waveform	Modified Sine Wave			
Frequency	60Hz $\pm$ 1Hz			
Power Efficiency	90%			
No Load Current Draw	<1.0A		<1.5A	<2.5A
Low Voltage Alarm Level	10.5V $\pm$ 0.5V			
Low Voltage Shutdown Level	9.5V $\pm$ 0.5V			
Overheat Protection	Yes			
Overload Protection	Yes			
Input Short Circuit Protection	Yes			
AC Outlets	3 Standard U.S. Grounded		4 Standard U.S. Grounded	
Dimensions of Unit	13.5 x 6.5 x 6.0 (in.)	15.3 x 6.5 x 6.0 (in.)	19.5 x 7.8 x 6.3 (in.)	21.5 x 7.8 x 6.3 (in.)
Weight of Unit	8.8 lbs	11.1 lbs	18.8 lbs	21.5 lbs
Wired Remote Control	Included			

SAMPLE APPLIANCES


TYPICAL WATTAGE*

50-200	AM/FM radio
100	Standard light bulb
300	Television
450-1500	Blender
600-1100	Vacuum cleaner
600-1500	Coffee maker
800-2400	Refrigerator
1000	Router
1000	Belt sander
1250	0.5 HP sump pump
1150	Washing machine
1500	Microwave oven
1500	1 HP air compressor
2000	7.25" Circular saw
2600	18,000 BTU air conditioner
2600-4000	Electric clothes dryer

*All wattages are estimates. Check the actual device wattage before use.

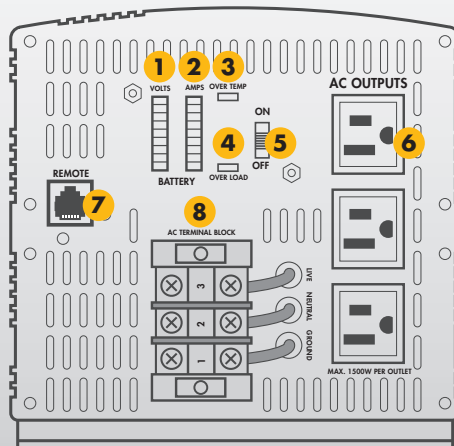

1. Volt Display
2. Amp Display
3. Over Temp LED
4. Overload LED
5. ON/OFF Switch
6. AC Outlets
7. Remote ON/OFF Switch Connection
8. High Output Terminals
9. Negative (-) DC Input Terminal

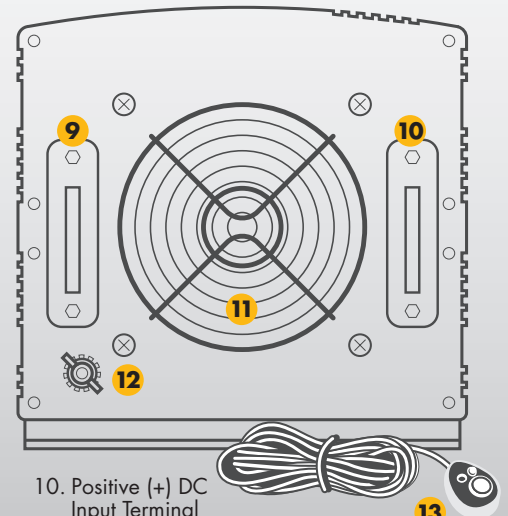

10. Positive (+) DC Input Terminal
11. High Speed Cooling Fan
12. Ground Terminal
13. Wired Remote Control